



We have taken innovation  
to the next stage!

## WHAT IS A DELINEATOR POST?

Impact-resistant collapsible signs created to improve safety by warning of risks and restricting vehicle access to designated zones.

Whether safeguarding bike lanes, pedestrian crossings, or parking entries, they play a vital role in keeping traffic organized and people protected.

Built for durability, they rebound to their upright position and original shape after impact, maintaining full functionality.

Perfect for use on medians, highways, detours, toll stations, bike lanes, crosswalks, parking access points, and safety crossings, they deliver reliable guidance and peace of mind for both motorists and pedestrians.

## Features

- Solar-Powered Collapsible Delineator Post.
- Flexible white polymer body absorbs impacts while protecting vehicles from damage.
- Durable one-piece design ensures long life in demanding conditions.
- Four reflective bands maximize visibility day and night.
- Easy installation on rigid base with 4 screws, 4 washers, and 4 extralarge anchor plugs (not included), ensuring stability and safety.


### Smart Solar-Powered System

- Integrated Ø 85 mm solar cell charges an eco-friendly rechargeable AAA battery.
- Delivers up to 12 hours of light with only 5 hours of sun exposure.
- Fitted with a state-of-the-art red LED (custom colors available).
- JVM smart circuit optimizes energy use for reliable, long-lasting performance.



Dimensions and other measurements  
are nominal and may vary by  $\pm 2\%$

Dimensions are in **inches**

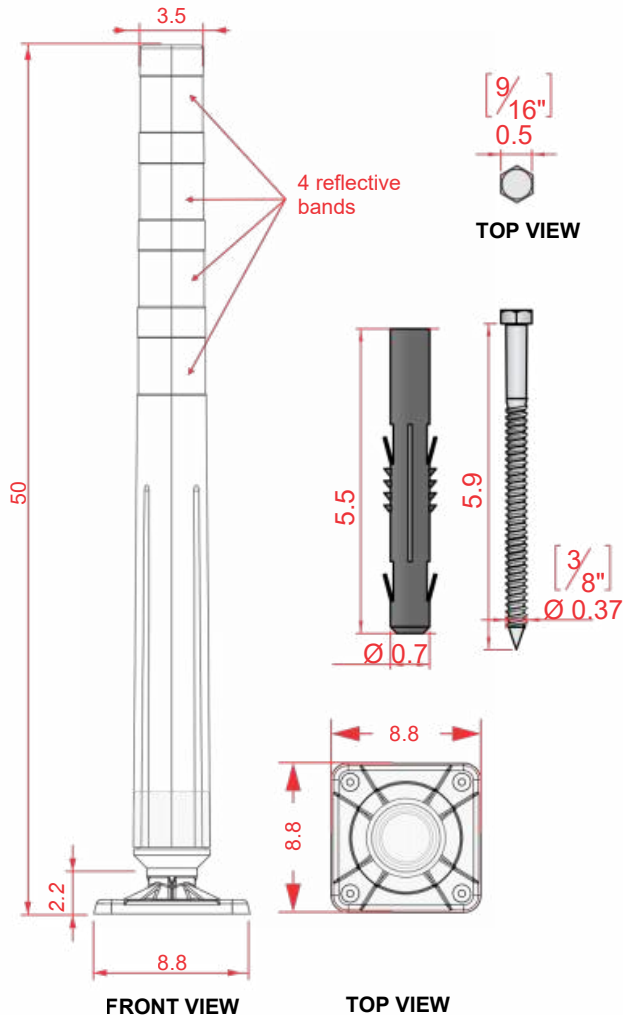


## Dimensions

<b>Total:</b>	Height: 50 in sup. ø: 3.5 in Base: 8.8 in
<b>Reflective element:</b>	4 bands
<b>Reflective color:</b>	White

## Anchoring system

For installation, mark the anchoring boreholes positions on the floor using the delineator post base as a template. Drill with a 3/4" bit for concrete to a depth of 6" (6 in). Insert the anchor plugs, position the delineator post, and fasten it with four 3/8" x 5.9 in screws and flat washers. Tighten with a 9/16" socket until secure. The installation is now finished.

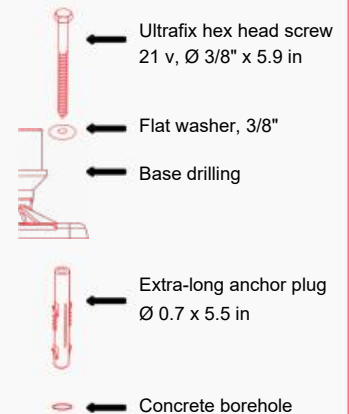

- Ultrafix hex screw 21 v, Ø 3/8" x 5.9 in.
- Ø 0.7 in x 5.5 in Extralarge anchor plug
- 3/8" flat washer

