

We have taken road safety
to the next level!

PRACTICAL REMOVABLE SYSTEM

- Removable traffic control bollard developed for effective temporary and permanent vehicle access control
- Durable design resists moderate impacts, and the removable system allows quick bollard removal whenever unrestricted access is needed
- Suitable for pedestrian spaces, restricted areas, and temporary event traffic control
- Permanently anchored flush-mounted base delivers outstanding stability, and the locking mechanism secures the bollard against unauthorized removal



Product Features

- Galvanized steel body available in standard traffic colors: orange, yellow, red, or black, depending on the application
- Black polymer base with UV protection for dependable outdoor performance
- Designed to withstand moderate impacts
- High-intensity reflective band improves visibility at night and in low-light conditions
- Base remains permanently secured to the pavement with concrete anchors and an extra-long mounting bolt (not included), allowing the bollard body to be inserted and locked in place
- Rigid design provides an effective visual and physical barrier; when the bollard is removed, the remaining low-profile traffic separator keeps the surface clear, and a protective cap covers the mounting socket
- Removable design simplifies cleaning, replacement, and relocation without additional pavement work


Recommended applications:

- Street and pedestrian access control
- Perimeter protection
- Temporary work zone traffic control
- Parking lot delineation
- Restricted and secure areas
- School zones



Dimensions are nominal and may vary by $\pm 2\%$

Dimensions are in **inches**

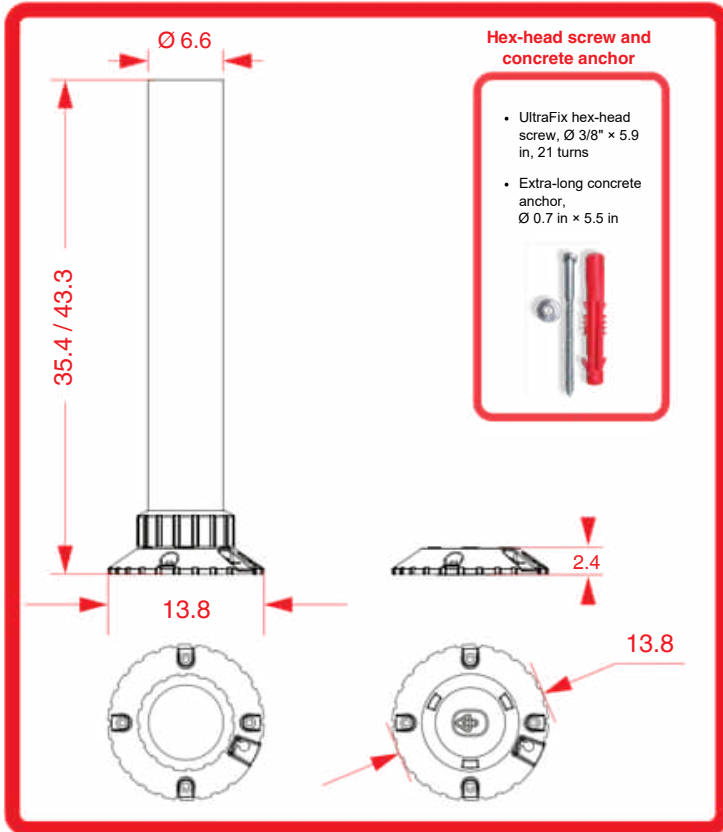

Dimensions

Body diameter:	6.6 in
Base:	$\varnothing 13.8$ in $\times$ 2.4 in H
Overall height:	35.4 or 43.3 in

Anchoring System

- Mark the four anchor holes at the installation point using the bollard base as a template
- Drill the anchor holes to a depth of 7 inches using a hammer drill and a $3/4"$ concrete drill bit
- Insert the extra-long concrete anchors into each concrete anchor hole
- Position the bollard on the base
- Install the $3/8"$ screw and flat washer
- Tighten using a $9/16"$ socket
- Complete the installation

