



Features

COMPLIES WITH NOM-034-SCT2 Standard

- Traffic sign compliant with NOM-034-SCT2, meeting national standards for visibility and effectiveness.
- Mounted on a Postiflex® post, ensures high resistance to adverse weather conditions for resistance to extreme weather conditions.
- Features ergonomic handles for convenient transport and includes hardware for stable, secure installation.
- Designed in an optimal size to ensure clear visibility from a distance.
- The sign can rotate up to 45° for improved preventive signaling.
- Available types:
 - Warning signs - Alert drivers to potential road hazards.
 - Regulatory signs - Indicate restrictions or prohibitions.
 - Construction signs - Provide information on ongoing roadwork.
 - Service signs - identify available facilities nearby
 - Civil protection signs - used in emergency response situations.
- Integrated IP68-rated electronic system, guaranteeing waterproof protection and reliable operation in rainy or humid conditions.

Design options



Technical Features


- Solar-powered signage panels, made from durable black polymer (single-sided).
- Mounted on Postiflex® posts, available in yellow or gray.
- Designed to withstand harsh weather and temperature variations, with UV protection to prevent sun-related damage.
- Long-lasting, corrosion-free material that resists deterioration caused by outdoor exposure.
- The polymer has no resale or reuse value, helping to prevent theft and vandalism.

Solar-powered systems

- Integrated top solar panel for autonomous, eco-friendly operation.
- High-efficiency LEDs with conical optics and mirrors ensure even light distribution and high visibility.
- 1.2V batteries provide long-lasting autonomous performance.
- JVM electronic circuit synchronizes signal flashing for uniform illumination.
- Charges in approximately 6 hours of direct sunlight and provides up to 12 hours of intermittent operation.

Note: Sign panels can be supplied without the solar-powered system

Dimensions and other measurements
are nominal and may vary by $\pm 2\%$

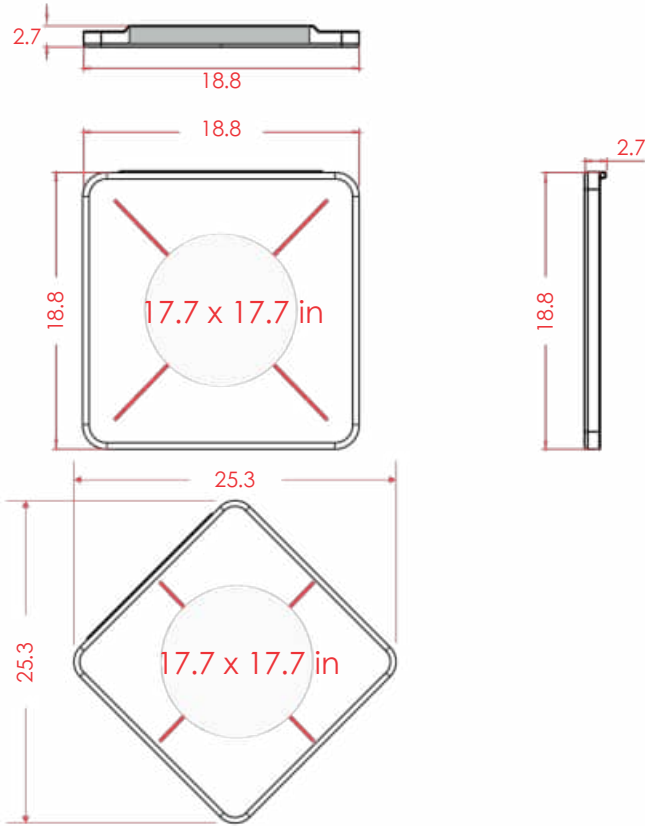

Technical Features


Overall dimensions:	Length: 18.8 in Width: 2.7 in Height: 18.8 in
Panel:	Length: 17.7 in Height: 17.7 in
Diamond-shaped panel:	Length: 25.3 in Height: 25.3 in
Reflective element:	According to design
Postiflex dimensions:	Width: 1.96 x 1.96 in Length: 13.12 ft Thickness: 0.19 in Width: 1.96 x 1.96 in Length: 9.8 ft Thickness: 0.11 in



POSTIFLEX®

Height

For both urban and interurban roads,
the lower edge of the sign panel should
be installed at 8.2 ft above the sidewalk
or road shoulder



Embedding

The post should be
embedded 19.7 inches
into the ground

Design options



SIGN PANEL

Regulatory: White reflective background, Type "A" or "B" as specified; matte black vinyl text and border, with red ring.

Warning: Yellow reflective background, Type "A" or "B"; matte black vinyl text and border.

Tourist: Blue reflective background, Type "A" or "B"; matte white vinyl text and border.

Service: Blue reflective background, Type "A" or "B"; matte white vinyl text and border.

Work Zone: Orange reflective background, Type "A" or "B"; matte black vinyl text and border.

Guaranteed vinyl adhesion for long-lasting performance.

Note: Optional customization with institutional logo through digital printing.