



Images are merely illustrative models.

Leader don't follow steps
... marks the way

WHAT IS A FLEXIBLE PALLET?

- Rigid or flexible post with option to internal or external light, or both, and with a heavy base. These pallet are designed for not go pass unnoticed.

It's main function is to persuade driver take care or some obstacle or event ahead on his way. Signalise is also to avoid vehicles trespassing to forbidden zones or pedestrian areas.

Is a safety item that save lives, useful in deviations, merges and crossings. Can be fixed to floor or portable.

FEATURES

• THE POLIFLEXY® SUPER PALLETS

- Idoneus and absolutely needed in deviations, merges and high risk points on rapid avenues and highways.
- Very resistant to several and continued vehicle's impacts.
- Flexible pallet has a multiple derivations.
- - Option to be rigid or flexible.
 - Lighten choices are: internal light, external or both.
 - 3 Colors for select: Orange, black and white.
- Body manufactured in special polyethylene registered formula poliflexy®, that results in a high ductility but resistant item, harmless to vehicles.
- Its heavy base is made out in black PVC, this characteristic is important if you are going to use the pallet as a temporary signalise.
- All poliflexy®'s pallets recover its original form, in case of been hitted, and rebound to stand vertical again.
- 5 reflective discs, prismatic quality, appear in the road during nights.
- Each fixed base has 4 augers for safe anchorage to floor, using 4 large screws 3/8" to introduce in 4 extralarge tackets not included.

LUMINUOS SYSTEM


- Controlled by a last-gen microprocessor using 06 ultra-brilliant leds (red, amber, green, blue) and a solar rechargeable system consisting in 02 photovoltaic panels and a battery pack.
- Maximum visibility distance: 33 ft.
- Luminous intensity + 18,000 milicandels.
- Charge cycle 12 hours (on plain sunlit).
- For an internal illuminated pallet, you must choose white body.

EMBEDDED SOLAR ROAD-STUD

- Road-stud with intelligent solar system.
- Solar panel solar and high efficient electronic system.
- Amber and traslucid blue led's colors with and operation angle of 30 degrees.
- Flasher frequency 3 Hz.



Measures are nominal and can vary, between +- 2%.
All in inches and pounds.

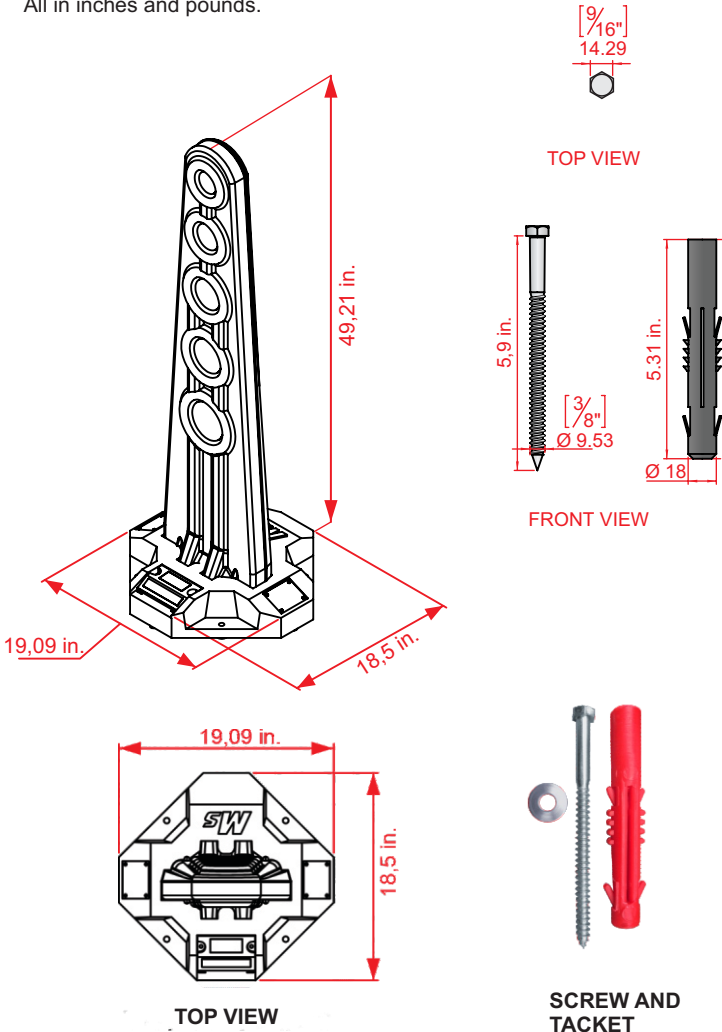

Measure	
Total	Height: 49,21 in. Base: 19,09 x 18,5 in.
Reflectives:	5 aligned discs
Reflective colors:	amber or white
Weight aprox:	23,68 lb (lighten option).

Anchorage System

Mark four holes on ground for place pallet base, using same this as a template. Then perforate with a 3/4" drill bit down to a 7" depth. Once the holes are correct introduce the tackets and place your Pallet.

Settle the 3/8" washer. Wrist it with the help of a 9/16" nut socket.

Your installation is complete.

- ← "Ultrafix" screw hexag head 21 v Ø 3/8"x 5.9 in.
- ← Plane washer.
- ← Product's pod.
- ← Extralarge tacket Ø 0.7 x 5.31 in.
- ← Auger on ground



+ safety resistance

- price