




Leader don't follow steps
... marks the way

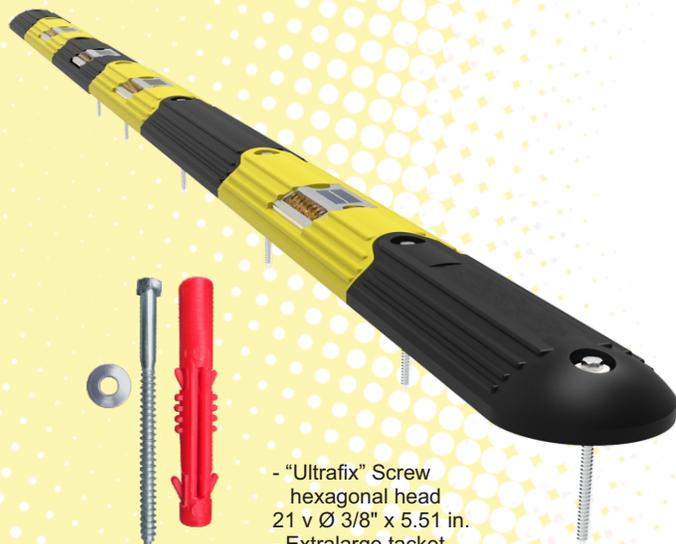


- "Ultrafix" Screw hexagonal head 21 v Ø 3/8" x 5.51 in.
- Extralarge tacket Ø .7 in. x 5.51 in.
- washer 3/8"

Technical Data:

Manufacture:	Polyethylene	
	Measures	Weight
Module Female :	15.74 in.	65,57 oz.
Module Central :	19.68 in.	87.23 oz.
Module Male :	18.30 in.	74.07 oz.
Colors	: Yellow, Black	

Features

- Excellent speed reducer for install on any street or avenue
- Very functional in any place in crowded zones were pedestrians, cyclists and else are permanently crossing the streets and safety is needed.
- Each part of device is entirely produced in its original color and is well engineered for no need maintenance at all.
- Also is undeformable and resistant to heavy impacts.
- Is all weather resistant and has U.V, ray protection.
- Its advanced rounded design let no sharpen zones or metallic parts inside that could cause potentially harm to people or properties.
- Fully adaptive to all kinds of plane floor.
- The bond system or this speed reducer is based on very strong male-female junctions.
- The module structure lets scale this device up to your needs, just limited for the number of parts.
- Easy to install everywhere. Each module has two auger for anchor to ground firmly.
- You can choose the luminous version, mantaining the same shape and the same benefits.
- **SOLAR POWERED SYSTEM**
- The solar option includes an aluminum solar stud embedded in the reducer parts.
- Each stud has 3 high intensity leds in amber color and one solar cell.
- Leds are 5000 mcd.
- Option for fix or flasher light.

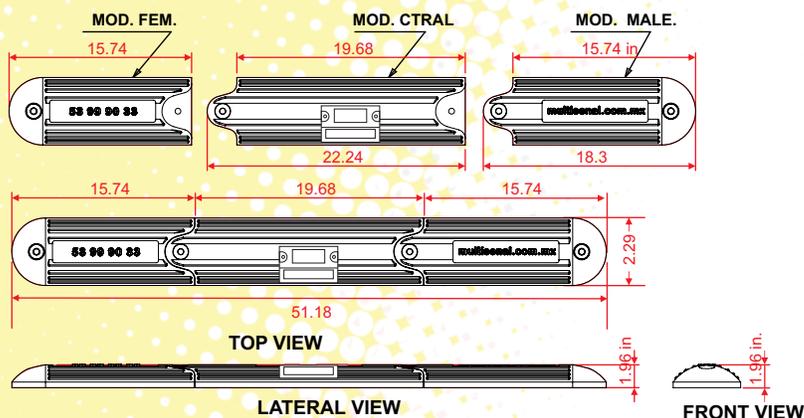

INSTALLATION NOTE:

- **Asphalt:** Steel Nails 1/2" x 10"
- **Cement:** "Ultrafix" Screw/
- Hexagonal Head 21 v Ø 3/8" x 5.9 in.
"Extralarge" Tacket, Ø 1.9 cm x 5.51 in.