

Leader don't follow steps
... marks the way



FEATURES

- Modern and robust bollard
- Help to create a safe and high standard environment
- Made out in polyethylene
- Has a tube steel soul inside, so its heavy impact resistant.
- Line colors are grey and black.
- Has two steel earrings for sustain a chain or a rope.
- Two locking-carabiners and a 3/8 in. chain with a charge limit of half ton for each tranche of 10 ft. between bollards.
- Rounded end.
- Free maintenance and easy to handle.
- UV ray resistant.
- Great durability.

WHAT BOLLARDS ARE?


Urban ornament resistant and protector. Indicate alignment with color.

Its main function is to avoid vehicles enter to forbidden zones, also works as safety traffic limiters.

Is recommended to use it in rows impeding vehicules to park on sidewalks and also to prevent invasion of pedestrian zone.



Measures are nominal
and can vary,
between +- 2%.
All dimensions in inches.

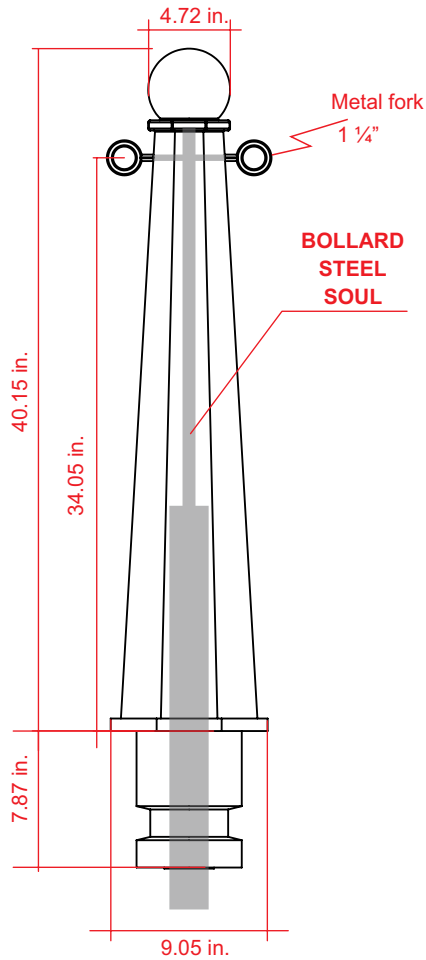

Measure

Total	Work height: 40.15 in. Base width: 9.05 in. each side
Reflectives:	None
Color reflectives:	None
Weight aprox:	53.46 lb.

First mark the auger ubication, then perforate a hole 10 inches diameter and 9 inches depth with a perforating punch. Clear of dirt the hole as possible and pour the cement mix (previously prepared). Insert just the bollard base, check the level (no more, no less) and fill the rest of the hole to get a good cimentation.

