




Leader don't follow steps
... marks the way

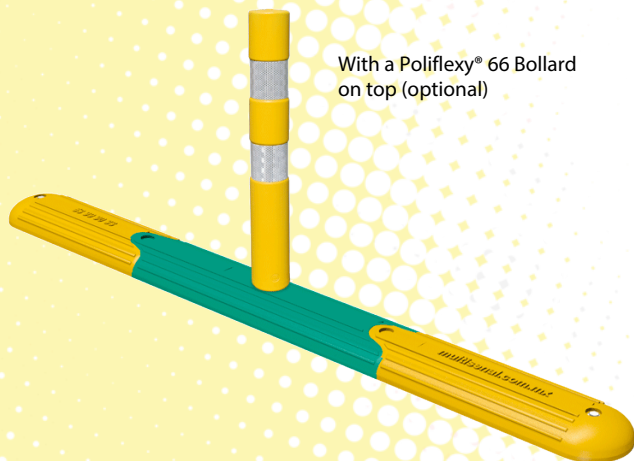

With a Poliflexy® 66 Bollard on top (optional)

Features

- Designed to mark or deviate traffic on any road.
- Modern and elegant channelizer.
- Ideal to confine special bus lanes and bicycle tracks.
- High resistance to impacts. Are practically undestroyable.
- Each element are manufactured with integral color, needed no maintenance.
- The device has no metal parts inside, no sharpen edges along its body, so its completely harmless to persons or properties.
- All weather resistant.
- Is adaptive to any kind of floor, just need plane surface.
- The pieces are configured in three different forms: left, right and central.
- Easy to install, each element has two augers for anchorage in floor.
- The recommendation with the this channeler is to put on top the Poliflexy® 66 Bollard (with catalog number Code: ITO-PF-66) to increase security and visibility during dark hours.
- Color yellow and / or green with two reflective band.
- The post is reboundable in case of run-ins.

Technical Data:

Manufacture:	Polyethylene	
Measures		Weight
Module Female :	15.74 in.	65,57 oz.
Module Central :	19.68 in.	87.23 oz.
Module Male :	18.30 in.	74.07 oz.
Colors :	Yellow, Black	

Installation Note:

- Asphalt: Install with steel nails ½" x 10" and hammer it carefully.
- Cement roads: First made a guide with drill bit 2" and perforate until 8 inches deep. Then fill it the holes with glue and get protection for use of the hammer, hammer it carefully.

